


LEDstar 3.2K-ML

Manual Legs

LED mobile lighting tower

Briteforce's premium LED mine specification light tower is available in two models LEDstar 3.2K-HL (hydraulic legs) and LEDstar 3.2K-ML (manual legs), both units provide 3200W of LED lighting. Built to cope with the toughest conditions. The LEDstar 3.2K series weighs less than 2 tonnes per tower, which means it can be towed by any on site vehicle.

The hydraulically/electrically operated light towers reach a maximum height of 10.2 metres with light bar tilt of 110° and rotation of 350°, all controlled from the ground. One-man operation of both tower and lights significantly reduces the likelihood of handling injuries when compared to manual control.

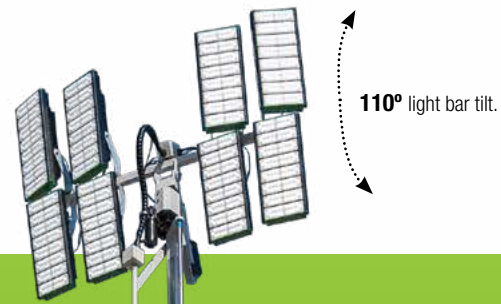

110° light bar tilt.



350° light bar rotation.



- FUEL CONSUMPTION 1.4LTR PER HOUR
- USER FRIENDLY
- MINE SITE READY
- SIMPLE ONE PERSON OPERATION
- FULL HYDRAULICS
- AUSTRALIAN MADE QUALITY BUILT
- FULLY BUNDED
- 215 HOUR RUNNING TIME PER TANK
- 3 YEAR WARRANTY ON LED LIGHTS
- 48 V DC LOW VOLTAGE

Light Capacity

8 x 400 W Briteforce
OctaLED 400 lights
3311 square metres
@100 lux 480,000 effective lumens

**LIGHT
YOUR SITE
TODAY**



**INDUSTRY
LEADERS IN
SUPPLYING
HAND BUILT,
HIGH QUALITY
PRODUCTS**



1300 003 533

briteforce.com.au



BRITEFORCE LEDstar 3.2K-ML LIGHTING TOWER SPECIFICATIONS

MAST SYSTEM

Max Boom Height	10.2 metres
Raise Hydraulic	(Double acting)
Extended Hydraulic	(Double acting)
Light Tilt	Electric 110° (12 V DC)
Light Bar Rotation	Electric 350° (12 V DC)
Cable Track Protection	Electric cable / Hydraulic hoses
Hydraulic System	12 V DC power unit
Wind Load Certified	100 km/h
Auto Operating	Stow pin

DIMENSIONS

Overall Height	2.3 metres
Overall Width	1.8 metres
Overall Length	4.9 metres
Dry Weight	1620 kg
Wet Weight	1870 kg
Max towing Speed	100 km/h
Wind load Certified	100 km/h

ELECTRICAL CONTROLS

Auto Start	Self-start ready
Auto Stop	Real time adjustable timer (up to 9 programs)
Boom Operation	Electric over hydraulic
Switch Operated	12 V DC power
Engine Protection	Fail safe (oil, temp, low coolant)
No Load Safety Start Up	Prevents starting and stopping under load
Emergency Stop	12 V DC power unit
Main Circuit Breaker	100 A

ENGINE

Yanmar	3TNV70 3 cylinder
Engine Speed	1500 rpm
Engine Power	6.1 kW
Hydraulic Oil Tank	11 litres
Fuel Tank	300 litres
Fuel Consumption	1.4 litres per hour

ALTERNATOR / GENERATOR / NSM (PMG)

Bearingless	Brushless
Output Voltage	48 V DC output
Output Amps	108 A

BRITEFORCE LIGHTS

LED	48 V DC light
Wattage	400 W per light
8 x Light Coverage	3311 square metres @100 lux 480,000 effective lumens
Warranty	3 years on LED lights

CHASSIS

Fully Bundled	Chassis
Base	Heavy duty RHS construction
Suspension	Heavy duty off road
Axle	Heavy duty off road
Brakes	Mechanical cable drum
Hand Brake	Mechanical cable
Wheels	R16 ROH off road L/C 6 stud
Tie Down Points	4
Manual Wind Down Stabilisers	4 legs

LIFTING

Centre Lift Point	Certified single point lift
Fork Lift Pockets	Both sides

OPTIONS

Rubber battery cover	75mm ring hitch
Cat style jump start receptacles	1500 hour service kit (oil, fuel and air)
Spare wheel carrier	Spare wheel
Exhaust system blanket	Custom colour choice
Locking gas stays	Day/night auto start stop sensor
Electric fuel sender with low fuel warning display	Wheel nut indicators
Wheel chocks & S/S brackets x 2	Internal work light
High vis asset numbers & strips on sides, rear and draw bar	
4.5kg or 9kg dry chemical fire extinguisher with quick release bracket	

10.2 metres



Leaders in LED technology
3 year warranty on LED lights.




Light Capacity

8 x 400 W Briteforce OctaLED 400 lights
3311 square metres
@100 lux 480,000 effective lumens

Briteforce Light Plot

8 x OctaLED400 lights

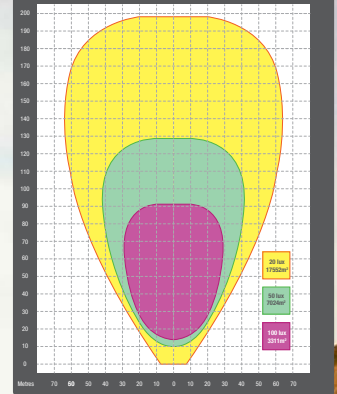

Safe and simple one person operation



BRITEFORCE

See your site in a new light

3 Meliador Way, Midvale WA 6056
e sales@briteforce.com.au

1300 003 533

briteforce.com.au

*Conditions apply.

Briteforce uses
YANMAR
engines



3TNV70